

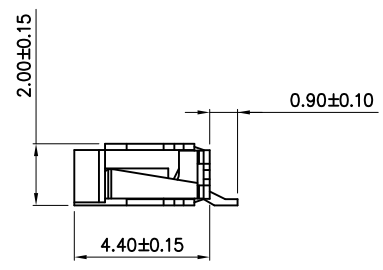
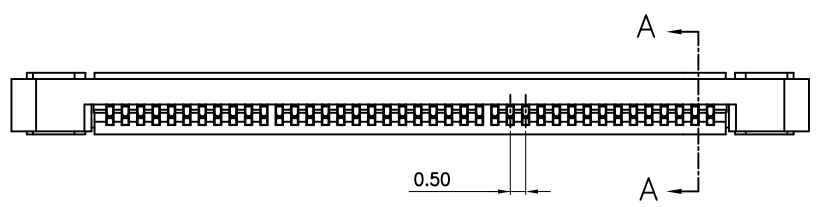

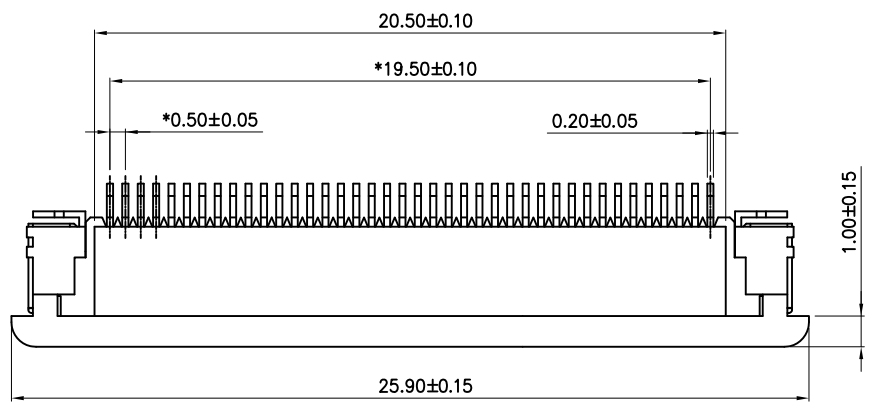


REV.	MARK	ECN NO.	MODIFY DES.	DR.	DATE
A				CHANG	09/05/07
B			REVISE DIM.	Ivy Hsu	02/20/2008
C	△		REVISE DIM.	Ivy Hsu	02/26/2008

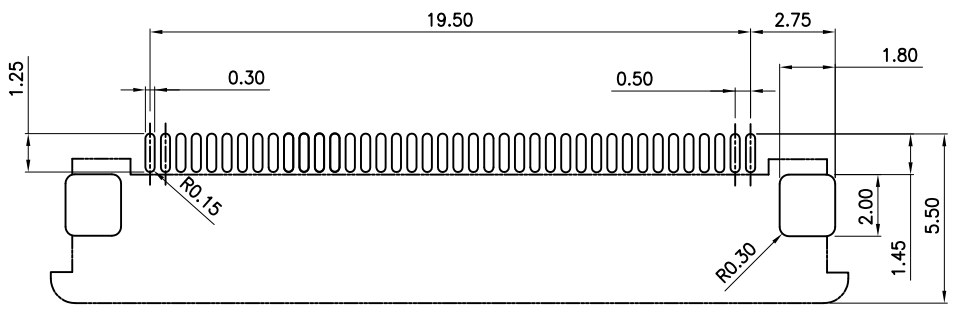

NOTE:

- MATERIAL:
  - HOUSING: THERMAL ENGINEERING PLASTIC UL 94V-0 RATE, COLOR IN BEIGE
  - COVER: THERMAL ENGINEERING PLASTIC, UL94 V-0 RATE, COLOR IN BROWN
  - CONTACT & PAD: BRASS, TIN PLATING, NICKEL UNDERPLATING
- SPECIFICATION:
  - VOLTAGE RATE: 50V
  - CONTACT CURRENT RATING: 0.5A
  - INSULATION RESISTANCE: 50 MINIMUM
  - CONTACT RESISTANCE: 20mΩ MAXIMUM
  - DIELECTRIC WITHSTANDING VOLTAGE: 250 Vrms AC FOR 1 MINUTE
  - OPERATING TEMPERATURE: -20°C+85°C
- CRITICAL DIMENSIONS MARK "\*"
- RoHS COMPLIANT
- COPLANARITY: 0.1MM MAXIMUM

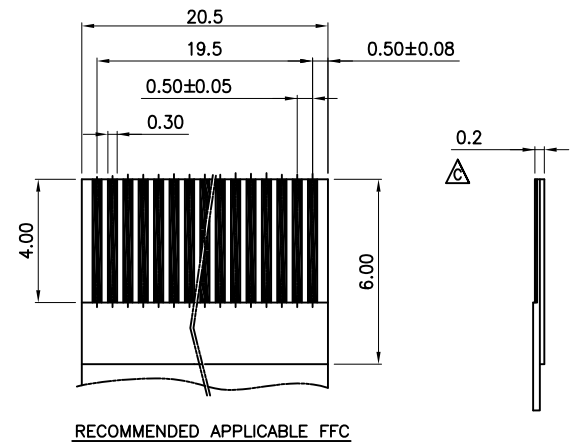

RECOMMENDED PCB LAYOUT  
ALL TOLERANCES ARE ±0.05

TABLE I

139240-01ATG210	TAPE ON REEL
139240-01ATG110	TUBE
PART NO.	PACKING

DWG NO. 13912-ATG040		ATERGI TECHNOLOGY CO.,LTD.,		APPROVAL	
P/N SEE TABLE I		APPD: Lung		TITLE: 0.5 PITCH FPC ZIF CONNECTOR RIGHT ANGLE SMT 40P BOTTOM CONTACT	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS TOLERANCES		CHKD:		DR: Chang	
SCALE: 1 : 1		UNITS: mm		SHEET: 1 OF 1	
DATE: 09,05,2007		REV. C			